


Product information

Automatic, sensor-controlled lighting of the stairs. Let the light turn on automatically when you enter the stairs and automatically go out. Save electricity while always having the light where you need it – when you need it.

Package contains:

- 1 Controller
- 6 m Sensor cables
- 2 pcs IR-sensors
- 1 Power supply
- 1 User manual

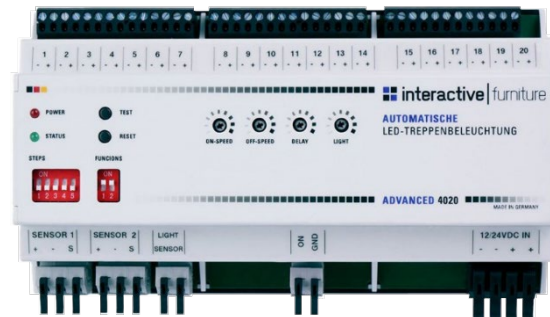

Specifications

Description	MIN	TYP	MAKS	Unit
Power per LED outlet	–	–	500	mA
Number of outlets	–	–	20	stk
Load of controller (at 12V)	0.05	–	7,5	A
Supply voltage	7	12	24	V
Power consumption during operation (at 12V)	–	0.25	–	W
Operating temperature	0	+20	+40	C°

Screw terminals LED control	MIN	TYP	MAKS	Unit
Cross section single wire	–	–	1.5	mm ²
Cross section fine wired	–	–	1.0	mm ²
Stripping length	–	5	–	Mm
Force on clamping screw	–	–	0.15	Nm

Spring-loaded terminals LED control	MIN	TYP	MAKS	Unit
Conductor cross-section	–	–	1.5	mm ²
Stripping length	6	–	10	mm

Spring-loaded terminals sensor connection	MIN	TYP	MAKS	Unit
Conductor cross-section	0.2	–	0,75	mm ²
Stripping length	6	–	7	mm



Used electrical and electronic products, including all types of batteries, must be delivered for recycling at a separate collection point. (acc. to directive 2012/19/EU and 2006/66/EC).